

# ENCLOSED CONDENSING UNITS

## PRODUCT FEATURES

- Easy install
- Fully wired
- Local parts
- Custom options
- Built to last
- Large condensers
- Powder coated
- Blue fins



## TECH DATA

## EMB136-3L

|                        |                        |
|------------------------|------------------------|
| <b>UNIT MODEL</b>      | EMB136-3L              |
| <b>STOCK CODE</b>      | AGQ2580                |
| <b>COMPRESSOR TYPE</b> | Maneurop Reciprocating |

| COMPRESSOR |       |     | FANS |      |       |
|------------|-------|-----|------|------|-------|
| MODEL      | DISP. | NOM | QTY  | SIZE | POLES |
| NTZ136-4   | 136   | 4   | 2    | 450  | 4     |


| AMBIENT<br>°C | R404A<br>COOLING CAPACITY (kW) |     |     |     |
|---------------|--------------------------------|-----|-----|-----|
|               | -30                            | -25 | -20 | -15 |
| 35°C          | 4                              | 5.2 | 5.7 | 6.7 |
| 40°C          | 3.4                            | 4.6 | 5   | 5.9 |
| 45°C          | 3                              | 4   | 4.3 | 5.1 |

Ratings based on 11 k suction superheat/3k subcooling  
 For 38° ambient ratings - multiply 35° by 0.94  
 For 43° ambient ratings - multiply 40° by 0.94

| ELECTRICAL |     |       |            |             |         |      |
|------------|-----|-------|------------|-------------|---------|------|
| COMPRESSOR |     | FAN   |            |             | OVERALL |      |
| VOLT.      | MRA | VOLT. | MRA (EACH) | MRA (TOTAL) | VOLT.   | MRA  |
| 415        | 17  | 240   | 1.75       | 3.5         | 415     | 20.5 |

| DIMENSIONS (MM) |     |      |     |     | CONNECTIONS |         |
|-----------------|-----|------|-----|-----|-------------|---------|
| (W)             | (D) | (H)  | KG  | (P) | LIQUID      | SUCTION |
| 1355            | 605 | 1200 | TBC | 450 | 1/2         | 1 1/8   |

| NOISE    |         | RECEIVER   | FITTED HP/LP |
|----------|---------|------------|--------------|
| dBA -10m | dBA -3m | VOLUME (L) |              |
| 48       | 58      | 6          | Auto/Manual  |

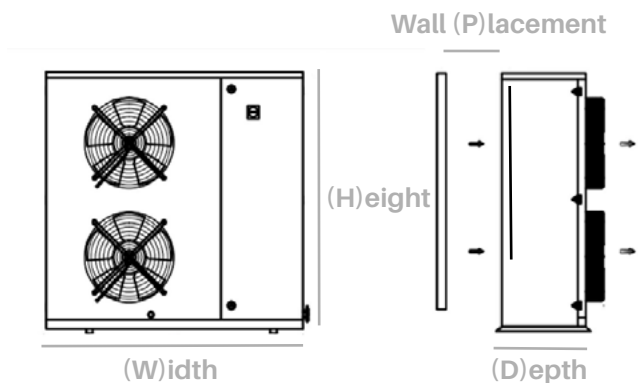

| FITTED WITH                                                                                                                                                                                                 | AVAILABLE OPTIONS                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• Fan speed controller</li> <li>• Suction accumulator</li> <li>• Drier &amp; sight glass</li> <li>• Oil sep</li> <li>• HPLP</li> <li>• CCH</li> <li>• NRV</li> </ul> | <ul style="list-style-type: none"> <li>• Fan cycle HP</li> <li>• Solenoid valve &amp; coil</li> <li>• Isolator</li> </ul> |

Please note additional fitted options may change the unit dimensions.