

# ENCLOSED CONDENSING UNITS

## PRODUCT FEATURES

- Easy install
- Fully wired
- Local parts
- Custom options
- Built to last
- Large condensers
- Powder coated
- Blue fins



## TECH DATA

## EMC92-1L

|                        |                                |
|------------------------|--------------------------------|
| <b>UNIT MODEL</b>      | EMC92-1L                       |
| <b>STOCK CODE</b>      | AGQ1300                        |
| <b>COMPRESSOR TYPE</b> | Embraco Hermetic Reciprocating |

| COMPRESSOR |       |         | FANS |      |       |
|------------|-------|---------|------|------|-------|
| MODEL      | DISP. | NOM. HP | QTY  | SIZE | POLES |
| NJ2192GJ   | 26.1  | 1 1/4   | 1    | 350  | 4     |


| ELECTRICAL |      |       |            |             |         |      |
|------------|------|-------|------------|-------------|---------|------|
| COMPRESSOR |      | FAN   |            |             | OVERALL |      |
| VOLT.      | MRA  | VOLT. | MRA (EACH) | MRA (TOTAL) | VOLT.   | MRA  |
| 240        | 6.36 | 240   | 0.58       | 0.58        | 240     | 6.94 |

| DIMENSIONS (MM) |     |     |     |     | CONNECTIONS |         |
|-----------------|-----|-----|-----|-----|-------------|---------|
| (W)             | (D) | (H) | KG  | (P) | LIQUID      | SUCTION |
| 805             | 555 | 650 | TBC | 350 | 3/8         | 5/8     |

| NOISE    |         | RECEIVER   | FITTED HP/LP |
|----------|---------|------------|--------------|
| dBA -10m | dBA -3m | VOLUME (L) |              |
| 33       | 43      | 2          |              |

| AMBIENT °C | R404A COOLING CAPACITY (kW) |      |       |     |     |
|------------|-----------------------------|------|-------|-----|-----|
|            | -30                         | -25  | -23.3 | -20 | -15 |
| 35°C       | 0.8                         | 1.1  | 1.2   | 1.5 | 1.8 |
| 40°C       | 0.8                         | 1    | 1.1   | 1.3 | 1.7 |
| 45°C       | 0.77                        | 0.96 | 1.06  | 1.2 | 1.6 |

Ratings based on 11 k suction superheat/3k subcooling  
 For 38° ambient ratings - multiply 35° by 0.94  
 For 43° ambient ratings - multiply 40° by 0.94

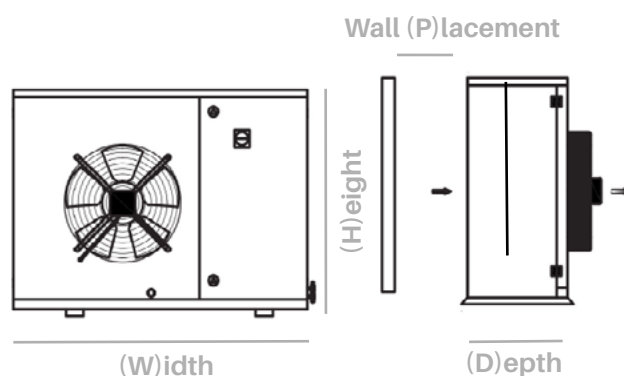

| FITTED WITH                                                                                                          | AVAILABLE OPTIONS                                                                                                                                  |
|----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• Drier &amp; sight glass</li> <li>• HPLP</li> <li>• Oil separator</li> </ul> | <ul style="list-style-type: none"> <li>• Fan speed control</li> <li>• Isolator</li> <li>• Suction accumulator</li> <li>• Solenoid valve</li> </ul> |

Please note additional fitted options may change the unit dimensions.