

ENCLOSED CONDENSING UNITS

PRODUCT FEATURES

- Easy install
- Fully wired
- Local parts
- Custom options
- Liquid injection
- Built to last
- Large condensers
- Powder coated
- Blue fins



TECH DATA

EMF15-3L

UNIT MODEL	EMF15-3L
STOCK CODE	AGQ2100
COMPRESSOR TYPE	Copeland Scroll

COMPRESSOR		FANS			
MODEL	NOM. HP	QTY	SIZE	POLES	
ZSI15KQE-TFM-527	5	2	450	4	


ELECTRICAL						
COMPRESSOR		FAN			OVERALL	
VOLT.	MRA	VOLT.	MRA (EACH)	MRA (TOTAL)	VOLT.	MRA
415	11.9	240	1.75	3.5	415	15.4

DIMENSIONS (MM)					CONNECTIONS	
(W)	(D)	(H)	KG	(P)	LIQUID	SUCTION
1355	605	1200	125	450	1/2	7/8

NOISE		RECEIVER	FITTED HP/LP
dBA -10m	dBA -3m	VOLUME (L)	
41	51	6	Auto/Manual

AMBIENT °C	R404A COOLING CAPACITY (kW)			
	-30	-25	-20	-15
35°C	4.4	5.3	6.5	7.6
40°C	4	4.8	5.9	6.9
45°C	3.6	4.4	5.4	6.3

Ratings based on 11 k suction superheat/3k subcooling
 For 38° ambient ratings - multiply 35° by 0.94
 For 43° ambient ratings - multiply 40° by 0.94

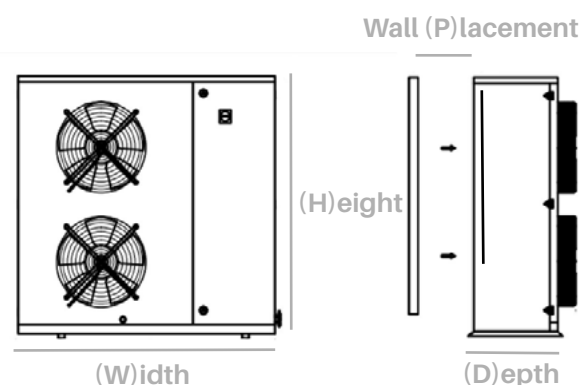

FITTED WITH	AVAILABLE OPTIONS
• Fan speed controller • Suction accumulator • Drier & sight glass • Oil sep • HPLP • CCH • NRV	• Fan cycle HP • Solenoid valve & coil • Isolator

Please note additional fitted options may change the unit dimensions.