

ENCLOSED CONDENSING UNITS

PRODUCT FEATURES

- Easy install
- Fully wired
- Local parts
- Custom options
- Built to last
- Large condensers
- Powder coated
- Blue fins



TECH DATA

EMF76-3H

UNIT MODEL	EMF76-3H		
STOCK CODE	AGQ0850		
COMPRESSOR TYPE	Copeland Scroll		
COMPRESSOR	FANS		
MODEL	QTY	SIZE	POLES
ZB76KQE-TFD	4	450	4

AMBIENT °C	R134a COOLING CAPACITY (kW)				
	-15	-10	-5	0	5
35°C	9.3	11.5	13.8	16.5	19.7
40°C	8.2	10.1	12.2	14.6	17.4
45°C	7.2	8.9	10.7	12.9	15.3


Ratings based on 11 k suction superheat/3k subcooling
 For 38° ambient ratings - multiply 35° by 0.94
 For 43° ambient ratings - multiply 40° by 0.94

To avoid compressor damage, suction superheat must be equal to 10k

ELECTRICAL						
COMPRESSOR		FAN			OVERALL	
VOLT.	MRA	VOLT.	MRA (EACH)	MRA (TOTAL)	VOLT.	MRA
415	20.4	240	1.75	7	415	27.4

DIMENSIONS (MM)					CONNECTIONS	
(W)	(D)	(H)	KG	(P)	LIQUID	SUCTION
2080	770	1360	317	450	5/8	1 3/8

NOISE		RECEIVER	FITTED HP/LP
dBA -10m	dBA -3m	VOLUME (L)	
57	67	15	Auto/Manual

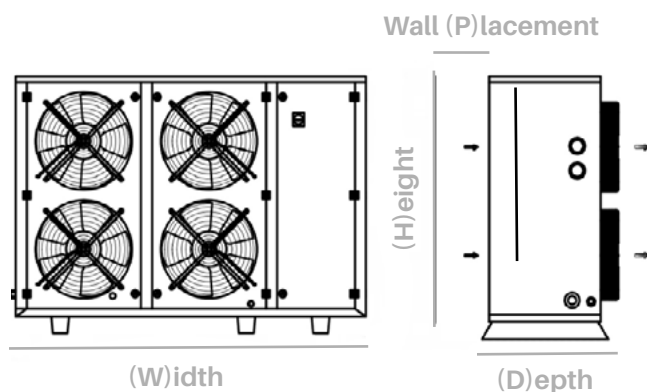

FITTED WITH

- Fan cycle HP
- Drier & sight glass
- Oil sep
- HPLP
- CCH
- NRV

AVAILABLE OPTIONS *

- Fan speed controller
- Solenoid valve
- Suction accumulator
- Isolator

* Please note additional fitted options may change the unit dimensions.