


OPEN CONDENSING UNITS

PRODUCT FEATURES

- Easy install
- Fully wired
- Local parts
- Custom options
- Built to last
- Large condensers
- Powder coated
- Blue fins

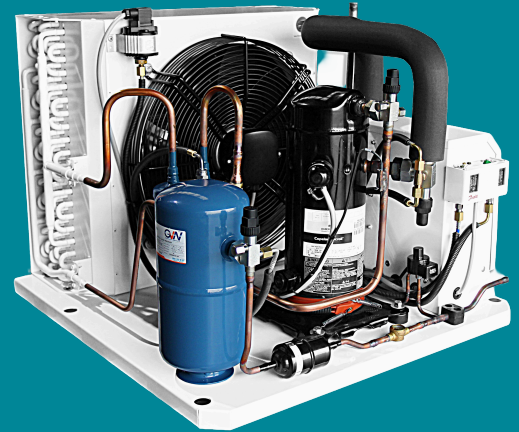

TECH DATA

OMF08-3L

UNIT MODEL	OMF08-3L
STOCK CODE	AGE1240
COMPRESSOR TYPE	Copeland Liquid Injection Scroll

COMPRESSOR		FANS		
MODEL	NOM. HP	QTY	SIZE	POLES
ZSI08KQE-TFP	2.5	1	400	4

ELECTRICAL						
COMPRESSOR		FAN			OVERALL	
VOLT.	MRA	VOLT.	MRA (EACH)	MRA (TOTAL)	VOLT.	MRA
415	6.10	240	0.82	0.82	415	6.92


DIMENSIONS (MM)					CONNECTIONS	
(W)	(D)	(H)	KG	(P)	LIQUID	SUCTION
705	700	550	TBC	400	3/8	5/8

NOISE		RECEIVER	FITTED HP/LP
dBA -10m	dBA -3m	VOLUME (L)	
TBC	TBC	4	Manual/Auto

AMBIENT °C	R404A COOLING CAPACITY (kW)			
	-30	-25	-20	-15
35°C	2.1	2.5	3.0	3.5
40°C	1.9	2.3	2.7	3.2
45°C	1.7	2.0	2.5	2.9

Ratings based on 11 k suction superheat/3k subcooling
For 38° ambient ratings - multiply 35° by 0.94 For 43° ambient ratings - multiply 40° by 0.94

Accumulator option recommended for low temp where the pipe run is less than 6m.
Fan speed control option is recommended for low temp and R134a applications.

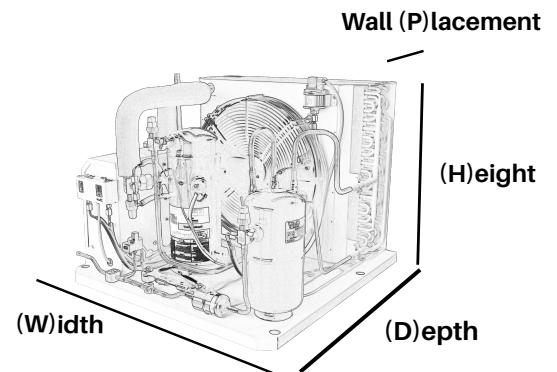

FITTED WITH	AVAILABLE OPTIONS
• Fan speed control • Drier & sight glass • HPLP • Oil separator • Crank case heater • Suction accumulator • Non return valve	• Isolator • Fan Cycle HP • Solenoid valve • Fully enclosed unit

Please note additional fitted options may change the unit dimensions.