




Refrigeration Press Fittings

► Introduction

COOL PRESS system is a copper press connection system designed for the air conditioning and refrigeration markets. It allows contractors to make secure leak-free connections in seconds. COOL PRESS utilizes a rubber stop ring, coated stainless steel grip ring and black HNBR sealing element to provide permanent leak-proof connections from 1/4" to 1 1/8".

► Features and Benefits

- **Flame-free:** Flame-free installation avoids the need for a fire permit and the risk of fire on site.
- **No Nitrogen Purge:** COOL PRESS is a mechanical joint, thus eliminating the need for nitrogen purge during the jointing process.
- **Lower Installed Cost:** A professional fitting which is quick and simple to install, saving time and money.
- **Higher Productivity, Improved Flexibility:** Work may be completed during working hours / public access, by a single employee.
- **Site Access:** Easy access to work sites, no gas bottles required.
- **Quality Designed In:** Reliable, repeatable, permanent, tamper-proof connections every time.
- **3-Point Press:** Three press points, one each side of the bead, and one press compressing the O-ring. This provides a secure joint.
- **High Quality O-ring:** High quality HNBR O-ring forms a secure leak-free joint when pressed.
- **Protected O-ring:** Lead-in edge design aids tube insertion and helps protect the O-ring from damage or displacement.
- **Electrical Continuity:** Maintains ground continuity without the need for additional ground continuity straps.
- **Field Proven:** Press fit technology, field proven over two decades and millions of installed fittings worldwide.
- **Compact Tooling:** Light compact tooling provides easy access to tightly spaced tube runs.
- **WARRANTY:** 15-year product warranty.

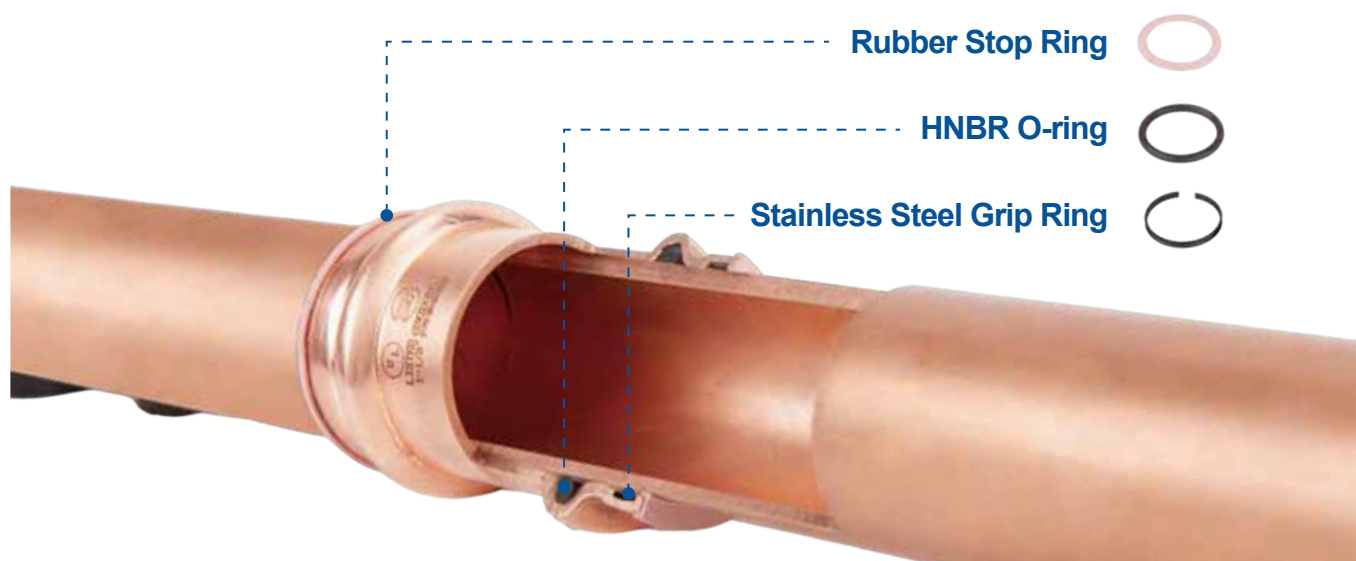

► Listings and Certifications

- UL 207 SA46123
 - UL Listed: Approved use for field and factory installations with A1 refrigerants
 - UL Recognized: Approved use for factory installations with A2, A2L, and A3 refrigerants
- UL 109 - 8 Vibration test, compliant
- UL 1963 - 79 Tests of gaskets and seals used in refrigerant systems, compliant
- ISO 14903 - 7.4 Tightness test, compliant
- ISO 14903 - 7.6 Pressure temperature vibration tests (PTV), compliant
- ISO 14903 - 7.8 Freezing test, compliant
- ISO 5149-2:2014, Refrigerating systems and heat pumps
 - Safety and environmental requirements
 - Part 2: Design, construction, testing, marking and documentation compliant
- ISO 5149-2, 5.3.2.2.3 Strength pressure test, compliant
- ASME B31.5 - 2016 Refrigeration Piping and Heat Transfer Components, compliant

► Technical Data

Maximum Rated Operating and Abnormal Pressure
700 psi / 48 bar / 4800 kPa

Continuous Operating Temperature
-40°F to 284°F/-40°C to 140°C

Vacuum Pressure Capability
200 Microns

Leak Tightness:
Helium $\leq 7.5 \times 10^{-7}$ Pa.m³/s at +20°C, 10 bar

Burst Pressure
>3X Maximum operating and abnormal pressure
>2,100 psig / >14400 kPa / >144 bar

Size Availability (Inches):
1/4, 3/8, 1/2, 5/8, 3/4, 7/8, 1-1/8



Applications: COOLPRESS fittings are designed for the following applications



- Refrigeration
- Air Conditioning
- Heat Pump (Refrigeration side)
- VRF and VRV

Fitting Materials	Compatibility
Fitting Body Refrigerant Grade Copper (UNS C12200 min 99.9% pure)	Approved Lubricants POE, PAO, PVE, AB and MO
O-Ring HNBR	Approved Connections Copper to Copper
Fitting Warranty	Approved Tube Copper tube conforming to AS 1571
15-year warranty	Approved Copper Tubing Annealed, Half Hard, Hard

Approved Refrigerants



R32	R125	R134a	R290	R404A
R407A	R407C	R407F	R407H	R410A
R454A	R454B	R438A	R448A	R449A
R454C	R452A	R452B	R507A	R600A
R452C	R1234yf	R1234ze		

Equal Tee PxPxP





PT Part No	Size D	L	L	A	A	L1	L1	A1	A1
		Inch	mm	Inch	mm	Inch	mm	Inch	mm
100517	1/4"	1.77	45.00	0.26	6.50	0.85	21.50	0.22	5.50
100518	3/8"	1.97	50.00	0.35	9.00	0.98	25.00	0.35	9.00
100519	1/2"	2.36	60.00	0.47	12.00	1.10	28.00	0.39	10.00
100520	5/8"	2.83	72.00	0.59	15.00	1.32	33.50	0.49	12.50
100521	3/4"	3.07	78.00	0.61	15.50	1.48	37.50	0.55	14.00
100522	7/8"	3.35	85.00	0.71	18.00	1.56	39.50	0.59	15.00
100523	1 1/8"	3.88	98.50	0.96	24.50	1.75	44.50	0.79	20.00

90° Elbow PxP




PT Part No	Size D	L	L	A	A
		Inch	mm	Inch	mm
100531	1/4"	0.94	24.00	0.31	8.00
100532	3/8"	1.02	26.00	0.39	10.00
100533	1/2"	1.20	30.50	0.49	12.50
100534	5/8"	1.40	35.50	0.57	14.50
100535	3/4"	1.28	32.50	0.79	20.00
100536	7/8"	1.75	44.50	0.79	20.00
100537	1 1/8"	2.09	53.00	1.12	28.50

90° Street Elbow FTGxP




PT Part No	Size D	L	L	L1	L1	A	A
		Inch	mm	Inch	mm	Inch	mm
100538	1/4"	0.94	24.00	1.00	25.50	0.31	8.00
100539	3/8"	1.02	26.00	1.10	28.00	0.39	10.00
100540	1/2"	1.16	29.50	1.28	32.50	0.45	11.50
100541	5/8"	1.40	35.50	1.56	39.50	0.57	14.50
100542	3/4"	1.28	32.50	1.77	45.00	0.79	20.00
100543	7/8"	1.75	44.50	2.01	51.00	0.79	20.00
100544	1 1/8"	2.09	53.00	2.32	59.00	1.12	28.50

45° Elbow PxP

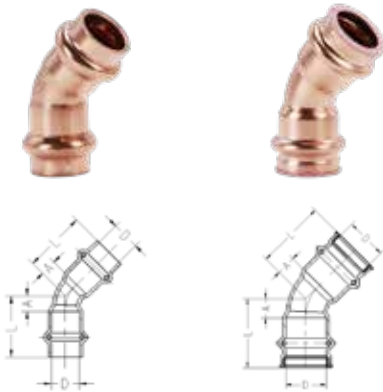

PT Part No	Size D1	L	L	A	A
		Inch	mm	Inch	mm
100524	1/4"	0.81	20.50	0.18	4.50
100525	3/8"	0.85	21.50	0.22	5.50
100526	1/2"	0.87	22.00	0.16	4.00
100527	5/8"	1.12	28.50	0.30	7.50
100528	3/4"	1.28	32.50	0.35	9.00
100529	7/8"	1.42	36.00	0.45	11.50
100530	1 1/8"	1.44	36.50	0.49	12.50


Coupling with Stop PxP

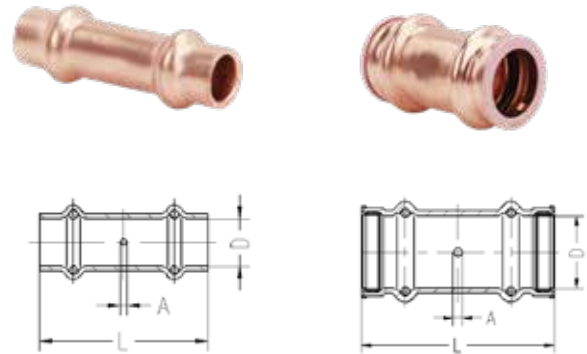


PT Part No	Size D1	L	L	A	A
		Inch	mm	Inch	mm
100545	1/4"	1.38	35.00	0.12	3.00
100546	3/8"	1.38	35.00	0.12	3.00
100547	1/2"	1.57	40.00	0.16	4.00
100548	5/8"	1.65	42.00	0.16	4.00
100549	3/4"	2.01	51.00	0.20	5.00
100550	7/8"	2.09	53.00	0.20	5.00
100551	1 1/8"	2.11	53.50	0.20	5.00

Reducing Coupling PxP

PT Part No	Size D1	Size D2	L	L	A	A
			Inch	mm	Inch	mm
100552	3/8"	1/4"	1.65	42.00	0.31	8.00
100553	1/2"	1/4"	1.57	40.00	0.24	6.00
100554	1/2"	3/8"	1.48	37.50	0.22	5.50
100558	3/4"	1/2"	1.95	49.50	0.31	8.00
100555	5/8"	1/4"	1.91	48.50	0.45	11.50
100556	5/8"	3/8"	1.75	44.50	0.30	7.50
100557	5/8"	1/2"	1.77	45.00	0.24	6.00
100560	7/8"	1/2"	2.05	52.00	0.37	9.50
100559	3/4"	5/8"	1.99	50.50	0.24	6.00
100562	7/8"	3/4"	2.15	54.50	0.26	6.50
100561	7/8"	5/8"	2.15	54.50	0.35	9.00
100564	1 1/8"	3/4"	2.28	58.00	0.39	10.00
100563	1 1/8"	5/8"	2.30	58.50	0.51	13.00
100565	1 1/8"	7/8"	2.28	58.00	0.35	9.00

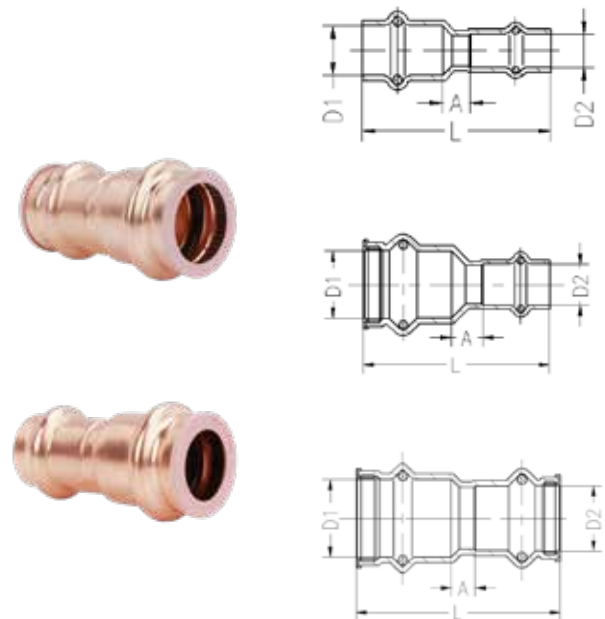

Flare

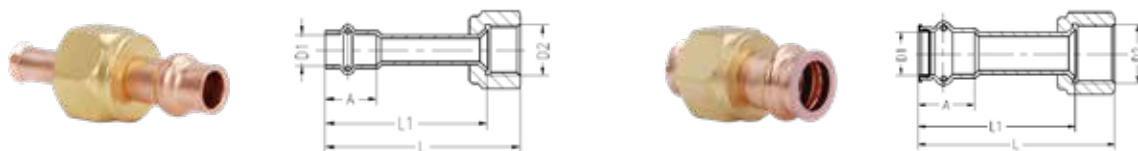

PT Part No	Size D1	Size D2	L Inch	L mm	L1 Inch	L1 mm	A Inch	A mm
100573	1/4"	UNF 7/16-20	2.13	54.00	1.79	45.50	0.63	16.00
100574	3/8"	UNF 5/8-15	2.40	61.00	1.99	50.50	0.63	16.00
100575	1/2"	UNF 3/4-16	2.50	63.50	2.03	51.50	0.71	18.00
100576	5/8"	UNF 7/8-14	2.91	74.00	2.32	59.00	0.83	21.00
100577	3/4"	UNF 1 1/16-14	3.21	81.50	2.54	64.50	0.93	23.50

Cap PxCap



PT Part No	Size D1	L Inch	L mm	A Inch	A mm
100566	1/4"	0.71	18.00	0.08	2.00
100567	3/8"	0.71	18.00	0.08	2.00
100568	1/2"	0.81	20.50	0.10	2.50
100569	5/8"	0.96	24.50	0.10	2.50
100570	3/4"	1.02	26.00	0.10	2.50
100571	7/8"	1.06	27.00	0.10	2.50
100572	1 1/8"	1.08	27.50	0.12	3.00



HEADQUARTERS

Warehouse 3, 95 South Gippsland Highway, Dandenong
South, VIC 3175

Email: sales@icoolpacific.com

Phone: 03 9706 4520

DISTRIBUTION CENTERS

Warehouse 3, 95 South Gippsland Highway,
Dandenong South, VIC 3175

1/9 Allen Place, Wetherill Park, NSW 2164

<https://www.icoolpacific.com/>