

Line Up – Large Capacity High Static Ducted

ARTH65KHTA



ARTH72KHTA



ARTH90KHTA



AOTH65KBTA
(Single Phase)

SET-ARTH65KHTA



AOTH65KRTA
(Three Phase)

SET-ARTH65KHTA-3PH



AOTH72KRTA
(Three Phase)

SET-ARTH72KHTA-3PH




AOTH90KRTA
(Three Phase)

SET-ARTH90KHTA-3PH


	18 kW Single Phase ARTH65KHTA	18kW 3 Phase ARTH65KHTA-3PH	20kW 3 Phase ARTH72KHTA-3PH	22.4kW 3 Phase ARTH90KHTA-3PH
Indoor	360 – 1400 - 850			
Indoor Weight	69kg			79kg
Outdoor	1418 – 970 – 370			
Outdoor Weight	101kg	102kg	107kg	
Pipe size	3/8 – 5/8 *		1/2 - 3/4 *	
Operation range	5.5 – 20kW		6 – 22.4kW	6.5 – 26kW
Breaker Size	32A	16A	20A	20A

*including longer pipe runs


Minimum – Rated - Maximum Cooling



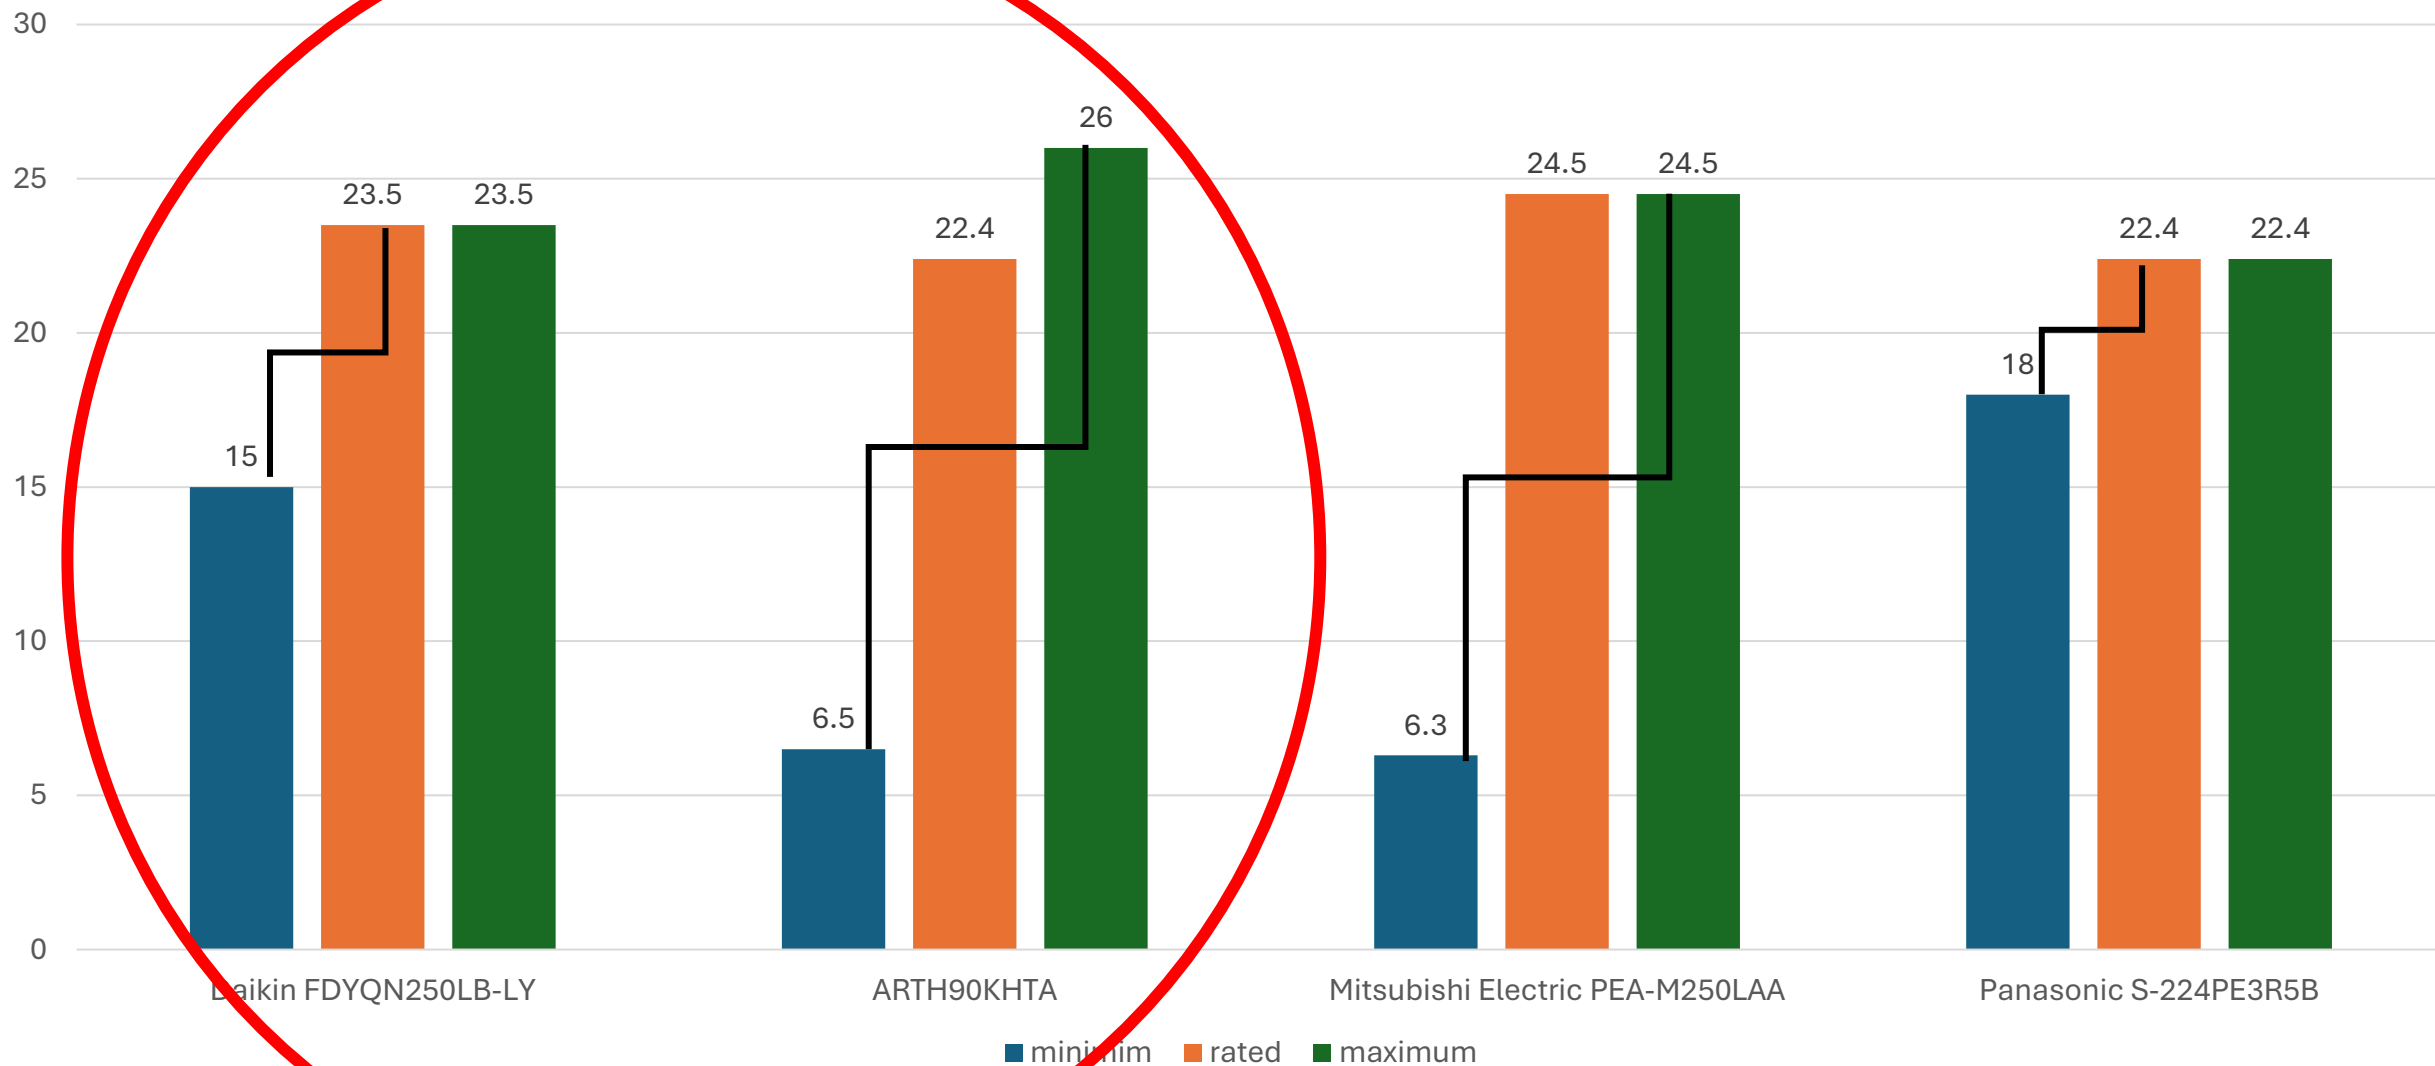


Power Input (kW)

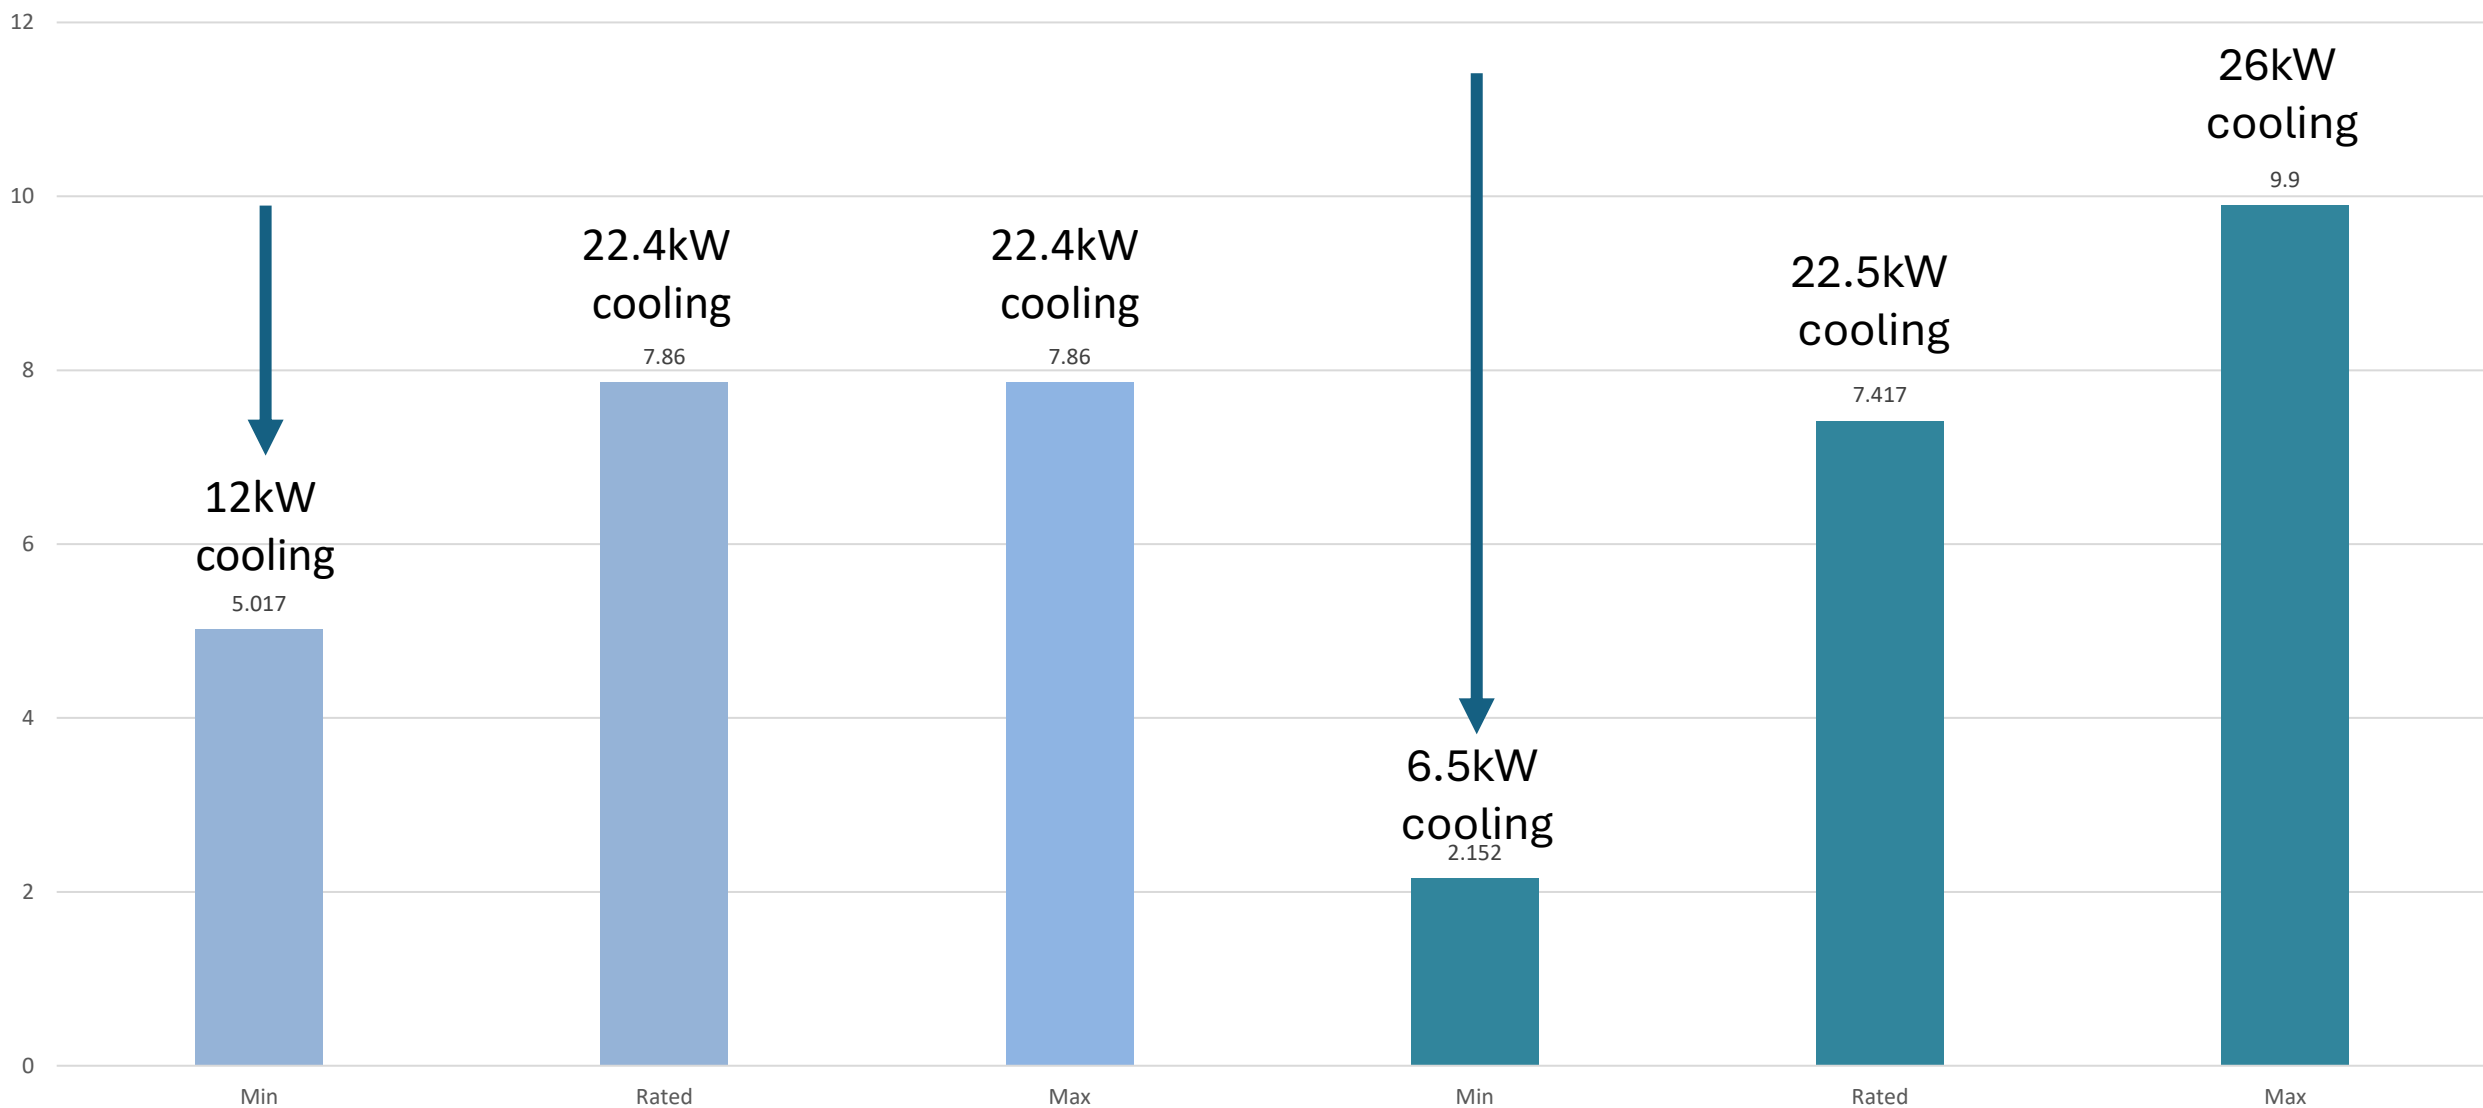

Economy mode
Regular Maintenance
Demand Response
Early operation
Optimal temperature settings
Maintain Airflow
Seal and insulate
Timer and smart controls
ETC....

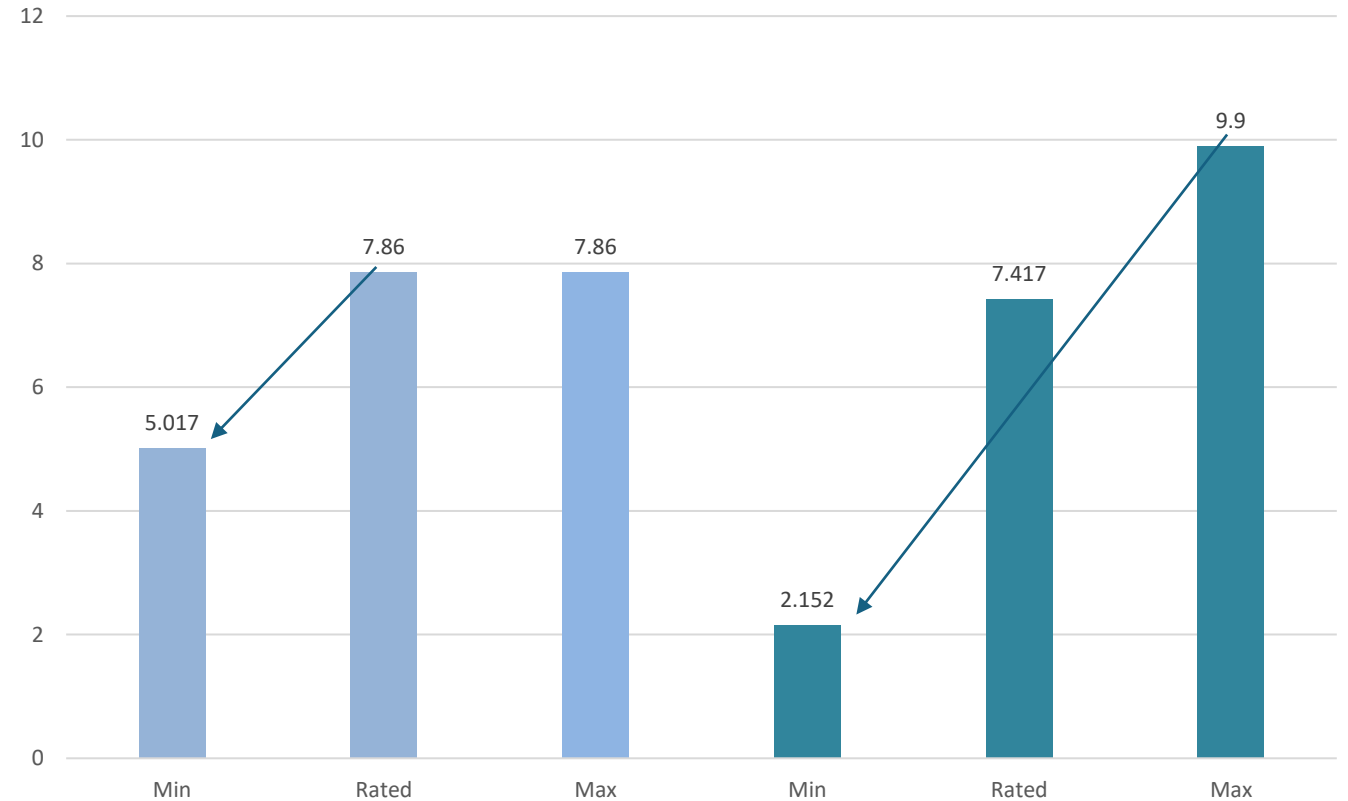

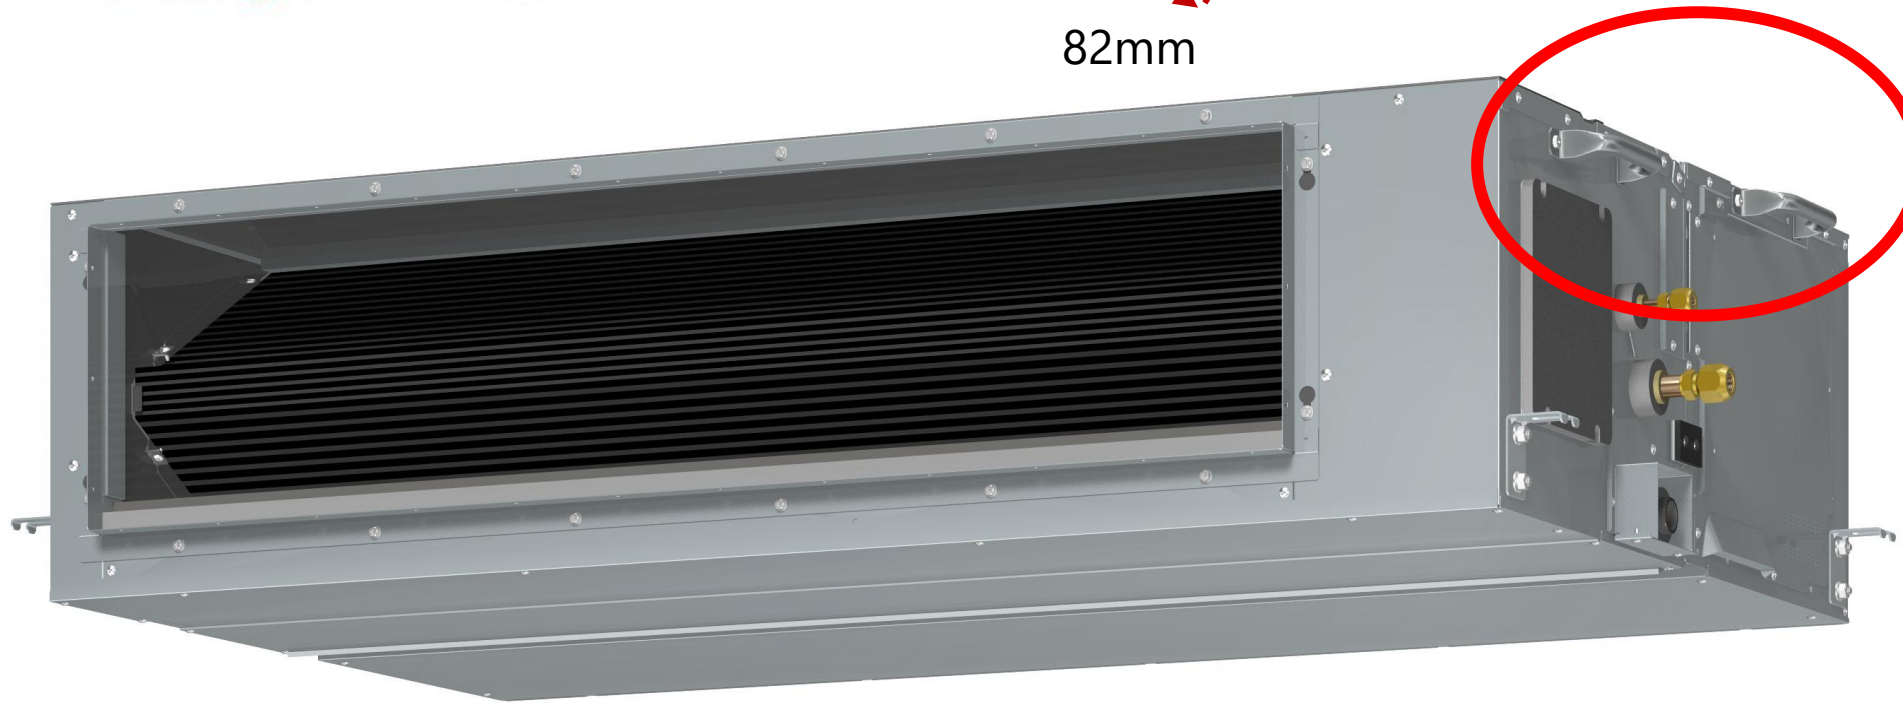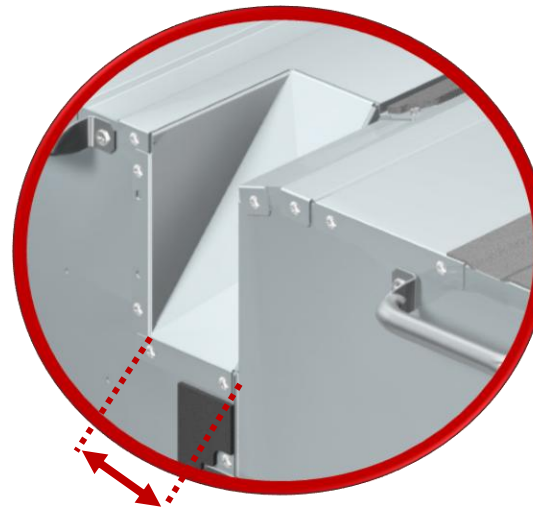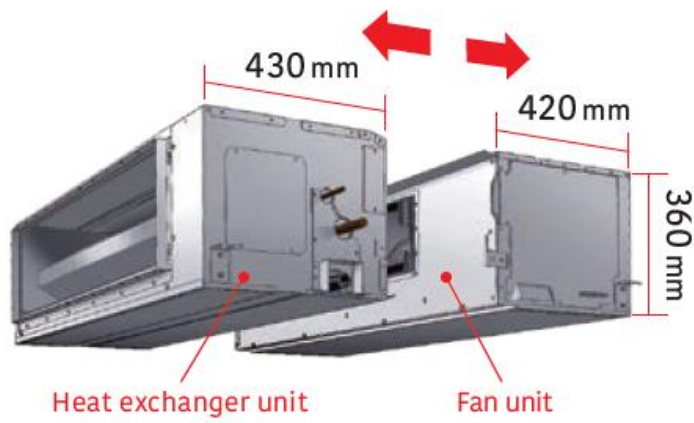





Ambient
operation
Range
-20°C to 50°C

When the upper space is open:


When there are obstacles at the rear only.

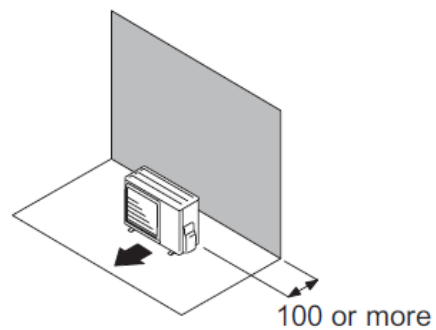


When there are obstacles at the front only.

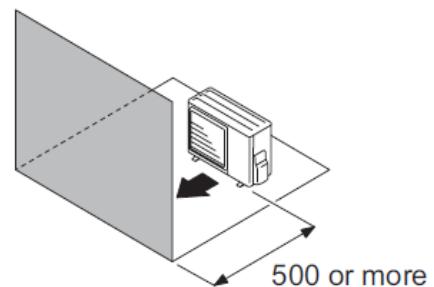

When there are obstacles at the rear and sides.

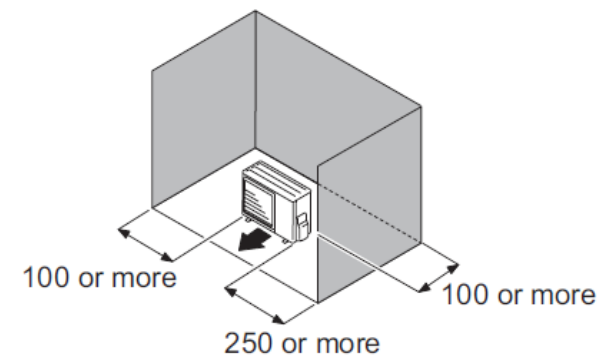

When there are obstacles at the front and rear.

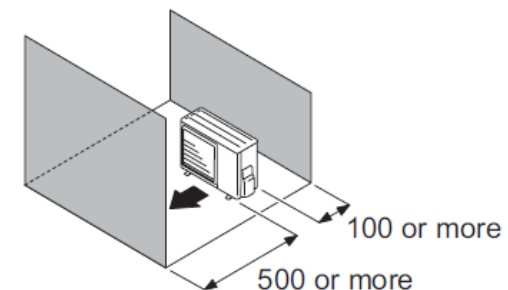

Unit: mm