

ENCLOSED CONDENSING UNITS

PRODUCT FEATURES

- Easy install
- Fully wired
- Quiet
- Custom options
- Built to last
- Large condensers
- Powder coated
- Blue fins



TECH DATA

EMF66-3M

UNIT MODEL	EMF66-3M
STOCK CODE	AGQ0240
COMPRESSOR TYPE	Copeland Scroll

COMPRESSOR		FANS		
MODEL	QTY	SIZE	POLES	
ZB66KQE-TFD	2	500	4	


ELECTRICAL						
COMPRESSOR		FAN			OVERALL	
VOLT.	MRA	VOLT.	MRA (EACH)	MRA (TOTAL)	VOLT.	MRA
415	17.5	240	2.1	4.2	415	21.7

DIMENSIONS (MM)					CONNECTIONS	
(W)	(D)	(H)	KG	(P)	LIQUID	SUCTION
1455	605	1300	165	500	5/8	1 1/8

NOISE		RECEIVER	FITTED HP/LP
dBA -10m	dBA -3m	VOLUME (L)	
57	67	10	Manual/Auto

AMBIENT °C	R404A COOLING CAPACITY (kW)				
	-15	-10	-5	0	5
35°C	12.8	15.8	18.9	22.7	27.1
40°C	11.3	13.9	16.7	20.1	23.9
45°C	9.9	12.3	14.7	17.7	21

Ratings based on 11 k suction superheat/3k subcooling
 For 38° ambient ratings - multiply 35° by 0.94
 For 43° ambient ratings - multiply 40° by 0.94

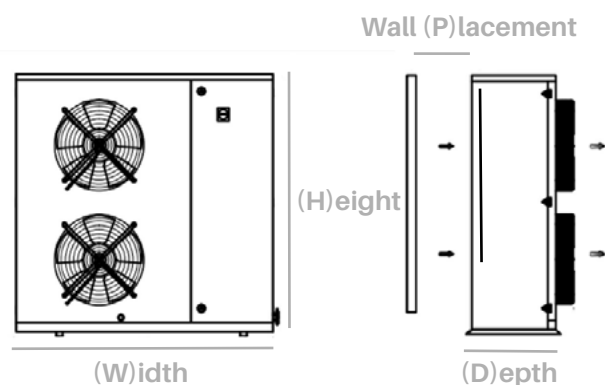

FITTED WITH	AVAILABLE OPTIONS
• Drier & sight glass • HPLP • Oil Sep • CCH • NRV	• Isolator • Suction accumulator • Solenoid valve • Fan speed control

Please note additional fitted options may change the unit dimensions.